

Easy clean feet

Excellent hygienic design produced to reduce contamination
High quality adjustable feet with an aesthetically pleasing design



Overview

Easy clean levelling feet offering:

- Stainless steel construction
- Sleek and rounded design
- Various sizes from stock
- A hygienic solution

Our team can advise you on the best solution for your application.

Key Properties

High quality stainless steel construction:

- Corrosion resistance
- Absorbs vibration
- None slip base
- Easy clean design

Benefits

Excellent quality you can rely on:



- Excellent hygienic standard
- Aesthetically pleasing design
- Core range available from stock
- Excellent stability and strength

Easy clean feet

A range of stainless steel, adjustable feet with a hygienic design

Key

Sp = Spindle thread size
Th = Total height
L = Spindle length
N = Newtons
4° = Articulation
E = Fixing hole centre
Ø15 = Diameter of hole

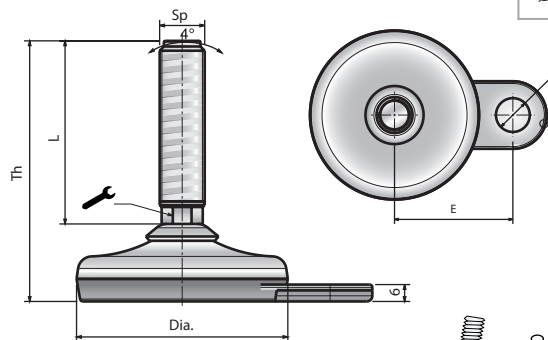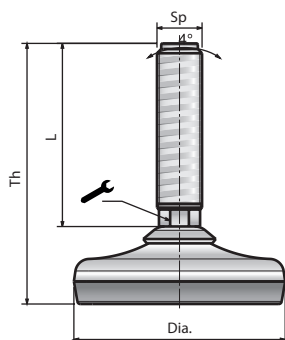

Part	Dia. (mm)	Sp	Th (mm)	L (mm)	N (mm)	N	Fixing hole
922 01	75	M12	80	50	9	8.000	No
922 02	75		105	75	9		
922 03	75		155	125	9		
923 01	75	M16	95	65	13		
923 02	75		145	115	13		
923 03	75		195	165	13		
924 01	75	M20	95	65	16		
924 02	75		120	90	16		
924 03	75		170	140	16		

925 01	100	M16	100	65	13	20.000	No
925 02	100		150	115	13		
925 03	100		200	165	13		
926 01	100	M20	125	90	16		
926 02	100		175	140	16		
926 03	100		225	190	16		
927 01	100	M24	125	90	16		
927 02	100		175	140	16		
927 03	100		225	190	16		

Part	Dia. (mm)	Sp	E (mm)	Th (mm)	L (mm)	N (mm)	N	Fixing hole
934 01	75	M12	52.5	80	50	9	8.000	Yes
934 02	75		52.5	105	75	9		
934 03	75		52.5	155	125	9		
935 01	75	M16	52.5	95	65	13		
935 02	75		52.5	145	115	13		
935 03	75		52.5	195	165	13		
936 01	75	M20	52.5	95	65	16		
936 02	75		52.5	120	90	16		
936 03	75		52.5	170	140	16		

937 01	100	M16	65	100	65	13	20.000	Yes
937 02	100		65	150	115	13		
937 03	100		65	200	165	13		
938 01	100	M20	65	125	90	16		
938 02	100		65	175	140	16		
938 03	100		65	225	190	16		
939 01	100	M24	65	125	90	19		
939 02	100		65	175	140	19		
939 03	100		65	225	190	19		

Other diameters available (mm): 50, 65, 125, 150 and 180.

Complete range

- Nuts and washers
- Threaded inserts
- Plastic bases are available from stock

Core range: highlighted in blue

